

Technical Report No.: 64.181.23.03037.01 Rev.00

Date: 2023-11-07

Client: Guangzhou Sprsun New Energy Technology Development Name:

Co., Ltd

Address: No.15 Tangxi Road, Yinsha Industrial Park, Xintang,

Zengcheng District, Guangzhou, 511338, China

Contact person: YE XIN

Manufacturer: Guangzhou Sprsun New Energy Technology Development Name:

Co., Ltd

Address: No.15 Tangxi Road, Yinsha Industrial Park, Xintang,

Zengcheng District, Guangzhou, 511338, China

Guangzhou Sprsun New Energy Technology Development Factory: Name:

Co., Ltd

Address: No.15 Tangxi Road, Yinsha Industrial Park, Xintang,

Zengcheng District, Guangzhou, 511338, China

Test object: Product: DC Inverter Air Source Heat Pumps

> Model: CGK-030V4P, CGK-040V4P, CGK-050V4P, CGK-060V4P

Trade mark: **SPRSUN**

Test specification: ✓ EN 14825:2022

> EN 12102-1:2022 ✓ EN 14511-3:2022

V

EN 14511-4:2022 Clause 4 **✓**

Purpose of Test according to the test specification

examination:

✓ (EU) No 813/2013

✓ EU 2016/2282:2016-11-30

Test result: The test results show that the presented product is in compliance with the above

listed test specifications.

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see testing and certification regulation, chapter A-3.4.

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 1 of 59

www.tuvsud.com

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



1 Description of the test object

1.1 Function

1.3

Manufacturer's specification for intended use:

The appliance is air to water heat pump.

Manufacturer's specification for predictive use:

According to user manual

1	2	Consideration	of the	foreseeable use	_
		CONSIDERATION	CH IIIE	TOTESEEADIE US	-

☐ Not applicable	
Covered through the applied	d standard
☐ Covered by the following cor	mment
☐ Covered by attached risk an	alysis
Technical Data	
Model:	CGK-030V4P, CGK-040V4P, CGK-050V4P, CGK-060V4P
Rated Voltage (V):	380-420V, 3N~
Rated Frequency (Hz):	50
Rated Power (W):	4310 for CGK-030V4P; 5050 for CGK-040V4P; 6800 for CGK-050V4P; 7830 for CGK-060V4P
Rated Current (A):	9.09 for CGK-030V4P; 10.66 for CGK-040V4P; 14.35 for CGK-050V4P; 16.53 for CGK-060V4P
Protection Class:	Class I
Protection Against Moisture :	IP X4
Construction:	Stationary
Supply connection :	☐ Non detachable cord
	Permanent connection to fixed wiring
Operation mode:	Continuous operation;
	☐ Intermittent operation;
	☐ Short time operation;
Refrigerant/charge (kg):	R290 / 0.80 for CGK-030V4P; 1.00 for CGK-040V4P; 1.20 for CGK-050V4P; 1.80 for CGK-060V4P
Declared parameters :	☑ Average ☐ Warmer ☐ Colder
Sound power level dB(A):	N/A
Series No :	KAL092210600600093 for CGK-030V4P; KAL092210600700014 for CGK-040V4P; KAL092210600800135 for CGK-050V4P;

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 2 of 59 www.tuvsud.com

KAL092210600900026 for CGK-060V4P

 $\mbox{T\"{U}V}$ $\mbox{S\"{U}D}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



2 Order

2.1 Date of Purchase Order, Customer's Reference

Date of Purchase Order: 2023-08-03

Customer's Reference: Guangzhou Sprsun New Energy Technology Development Co., Ltd

2.2 Test Sample(s)

• Reception date(s): 2023-08-07

· Location(s) of reception:

For Energy test:

Guangzhou Customs District Technology Center

(CNAS accredited laboratory with Registration No.CNAS L2322)

Address: No.3, Desheng East Road, Daliang, Shunde District, Foshan, Guangdong, China

For Noise tests:

CVC Testing Technology Co., Ltd.

(CNAS accredited laboratory with Registration No.CNAS L0095)

Address: No.3, Tiantai Yilu, Kaitai Avenue, Science City, Guangzhou, Guangdong, China

M Decision rule according to ILAC-G8:00/2019 clause 4.2.1 Rinary statement for simple

• Condition of test sample(s): completed and can be normal operation

2.3 Date(s) of Testing

2023-08-07 to 2023-10-30

2.4 Location(s) of Testing

Same as 2.2

2.5 Points of Non-compliance or Exceptions of the Test Procedure

N/A

3 Test Results

Decision rule according to 12A0-00.03/2013 clause 4.2.1 binary statement for simple
acceptance rule or IEC Guide 115:2023, clause 4.3 Simple acceptance was applied.
☐ Decision rule according to customer's requirements was applied. It is:
$\hfill\square$ Decision rule according to ILAC-G8:09/2019 clause 4.2.2 Binary statement with guard band -
guard band length = 95 % extended measurement uncertainty, was applied.
□ Decision rule (based on ILAC-G8:09/2019 clause 4.2.3 Non-binary statement with guard band
guard band length = 95 % extended measurement uncertainty) for an upper specification limit (A lower limit or specification with an up-per and a lower limit is treated similarly.):
•Compliance with the requirement: If a specification limit is not breached by a measurement
result plus the expanded uncertainty with a 95% coverage probability, then compliance with the
specification will be stated (e. g. Pass).
•Non-compliance with the requirement: If a specification limit is exceeded by the measurement
result minus the expanded uncertainty with a 95% coverage probability, then non-compliance
with the specification will be stated (e. g. Fail).
•Inconclusive result: If a measurement result plus/minus the expanded uncertainty with a 95 %
coverage probability overlaps the limit it will be stated that it is not possible to state compliance of
non-compliance.
☐ There are no statements to conformity or no results with measurand stated in this report, no

Project No: 64.181.23.03037.01

decision rule has been applied.

Rev.: 00 Date: 2023-11-07 Page: 3 of 59 www.tuvsud.com



Positive Test Results 3.1

See Appendix I

Remarks

General 4.1

The user manual has been examined according to the minimum requirements described in the product standard. The manufacturer is responsible for the accuracy of further par-ticulars as well as of the composition and layout.

When the product is placed on the market, it must be accompanied with safety Instructions 4.2 written in official language of the country. The instructions shall give information re-garding safe operation, installation and maintenance.

5 **Documentation**

· Appendix I: Test results

· Appendix II: Marking plate

· Appendix III: photo documentation

· Appendix IV: Construction data form

• Appendix V: Test equipment list

6 **Test History**

- 1) These appliances are Air To Water Heat Pump Unit, each one including a whole compression type refrigerant circuit to heat water in another circuit. These appliances were for cooling and heating water function, this report only for heating capacity test.
- 2) The main power is supplied by a 5-pole supply cord connecting to fixed wiring.
- 3) Water enthalpy method was adopted in this report.
- 4) Standby mode power, off mode power and thermostat-off mode power were tested according to clause 12 of standard EN 14825:2022.

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch **TÜV SÜD Group**

William Liang, Project Handler Tested by:

printed name, function & signature

Approved by: Plum Li, Designated Reviewer

printed name, function & signature

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 4 of 59

www.tuvsud.com

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China





Table 1.	Heating mode (Low temperature application):							Р		
Model	CGK-030V4P									
Product type	Air to Water I		Average	□ Warmer □				Colder		
1. Test condit	ions:									
	F	Part Load Ra	tio				door			r heat
Condition	Form	in %	۸۰	verage			chang			anger
	I OIII	iuia		imates		-	(wet) b ture (°			let water ures (°C)
А	(-7-16)/(Tde	esignh-16)		88		-7((-8)		a /	34
В	(+2-16)/ (Td	esignh-16)		54		2(1)		a /	30
С	(+7-16)/(Tde	esignh-16)		35		7(6)		a /	27
D	(+12-16)/(Td	lesignh-16)		15		12([11]		a /	24
Е	(TOL	16)/ (Tdesiç	nh-16	i)	TOL				a / 35.3	
F	(Tbivalent-16)/(Tdes		signh-16)		Tbiv				a / 34	
G	(-15-16)/(Td	esignh-16)		N/A		-1	15		N	/A
Remark: a) With conditions, the conditions at 2.Tested data	capacity is 7.49	00kW, the po	wer is							
General test	Unit	A(-7)/W34		2/W30	A7/W2	27	Δ12	/W24	A(-10)/	A(-7)/W34
conditions/ Part-Load	Offit	(88%)		54%)	(35%			5%)	W35.3 (100%)	(88%)
		А		В	С		I	D	Е	F
Data collection period	hh: min:sec	3:00:00	1:	:10:00	1:10:0	00	1:1	0:00	3:00:00	3:00:00
The heat pump defrosts		Yes		No	No		Ν	lo	Yes	Yes
Electrical Prop	erties	-		,					-	-
Voltage	V	400.3	4	400.9	400.9	9	40	0.9	400.3	400.3
Current input of the unit	А	3.85		1.64	1.49	1	1.	32	3.86	3.85
Power input of the unit	kW	2.054	(0.793	0.705	5	0.6	607	2.064	2.054
Compressor frequency	Hz	70		30	30		3	80	70	70

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 5 of 59 www.tuvsud.com

TÜV®

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch



Test condition	s User Side						
Water flow	m³/h	1.31	1.31	1.31	1.31	1.31	1.31
Inlet Water temperature	°C	29.78	27.52	25.50	23.34	31.34	29.78
Outlet Water temperature	°C	33.67*	30.05	28.41	26.63	34.97*	33.67*
Test condition	s Source Side						
Barometric pressure	kPa	101.02	101.01	101.01	101.02	101.01	101.02
Air inlet temperature, DB	°C	-7.00	2.00	7.00	12.00	-10.00	-7.00
Air inlet temperature, WB	°C	-7.99	1.00	6.00	11.00	-11.00	-7.99
Summary of th	e results						
Total heating capacity	kW	5.871	3.814	4.394	5.020	5.461	5.871
Effective power input	kW	2.024	0.763	0.675	0.577	2.034	2.024
Coefficient of performance (COP)	kW/kW	2.90	5.00	6.51	8.70	2.69	2.90

Remark: * In part condition, outlet temperature data is recorded by the full average complete cycle's data.

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.035
Standby mode [P _{SB}]	kW	0.024
Crankcase heater [P _{CK}]	kW	0.042
Off mode [P _{OFF}]	kW	0.024

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 6 of 59 www.tuvsud.com

TÜV®





3.Calculation/	conclusion f	for SCOP:							
Tdesignh(°C):	-10		Tbiv(°C):	-7					
Pdesignh(kW):	6.636		TOL(°C):	-10	-10				
Test result A,	B, C, D, E, F	conditions	s:						
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load			
Е	6.636	5.461	2.69	0.90	1.00	2.69			
F	5.871	5.871	2.90	0.90	1.00	2.90			
А	5.871	5.871	2.90	0.90	1.00	2.90			
В	3.573	3.814	5.00	0.90	0.94	5.00			
С	2.297	4.394	6.51	0.90	0.52	5.96			
D	1.021	5.020	8.70	0.90	0.20	6.25			
CR: part load div	vided by capac	ity;		•					

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	4.79
SCOP:	kWh/kWh	4.77
Q _H :	kWh/year	13710
Q _{HE} :	kWh/year	2874
$\eta_{s,h}$	%	187.8
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 2)		A+++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 7 of 59

www.tuvsud.com





Table 2.	Heating mode (Medium temperature application):						F	•		
Model	CGK-030V4P									
Product type	Air to Water	Heating season	I IVI TAVERAGE I I I VVARMER I I I						Colder	
1. Test condit	ions:									
	F	Part Load Ra	tio		_		door		Indoor heat	
Condition	Form	in %	Ι Δ.	(orogo			change			anger
	Foili	iuia	Average climates			-	(wet) b ture (°0		temperat	let water ures (°C)
А	(-7-16)/(Tde	esignh-16)		88		-7	(-8)		a /	52
В	(+2-16)/ (Td	esignh-16)		54		2	(1)		a /	42
С	(+7-16)/(Td	esignh-16)		35		7	(6)		a /	36
D	(+12-16)/(To	lesignh-16)		15		12	(11)		a /	30
Е	(TOL	-16)/ (Tdesig	nh-16)		T	OL		a / 55.3	
F	(Tbivalent-16)/(Tdes		signh-16)		Tbiv		a / 52			
G	(-15-16)/(Td	esignh-16)		N/A		-	15		N.	/A
Remark: a) With conditions, the conditions.	capacity is 6.82	21kW, the po	wer is							
General test conditions/ Part-Load	Unit	A(-7)/W52 (88%)	A2	2/W42 54%)	A7/W3 (35%			/W30 5%)	A(-10)/ W55.3 (100%)	A(-7)/W52 (88%)
		А		В	С		Ι)	Е	F
Data collection period	hh: min:sec	3:00:00	1:	10:00	1:10:0	00	1:10	0:00	3:00:00	3:00:00
The heat pump defrosts		Yes		No	No		Ν	lo	Yes	Yes
Electrical Prop	erties	-							•	
Voltage	V	400.1	4	100.8	400.9	9	40	0.9	400.1	400.1
Current input of the unit	А	4.53		1.92	1.80		1.	61	4.52	4.53
Power input of the unit	kW	2.444	C).943	0.869	9	0.7	759	2.439	2.444
Compressor frequency	Hz	70		30	30		3	80	70	70

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 8 of 59

www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Test condition	s User Side						
Water flow	m³/h	0.75	0.75	0.75	0.75	0.75	0.75
Inlet Water temperature	°C	45.03	37.90	33.42	28.87	48.94	45.03
Outlet Water temperature	°C	51.56*	41.97	38.21	34.41	54.75*	51.56*
Test condition	s Source Side	-		-	-	-	-
Barometric pressure	kPa	99.85	99.85	99.85	99.80	99.75	99.85
Air inlet temperature, DB	°C	-6.99	2.00	7.01	12.01	-10.00	-6.99
Air inlet temperature, WB	°C	-7.99	1.00	6.01	11.00	-10.93	-7.99
Summary of th	e results						
Total heating capacity	kW	5.617	3.520	4.147	4.800	4.996	5.617
Effective power input	kW	2.441	0.940	0.866	0.756	2.436	2.441
Coefficient of performance (COP)	kW/kW	2.30	3.75	4.79	6.35	2.05	2.30

Remark: * In part condition, outlet temperature data is recorded by the full average complete cycle's data.

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.035
Standby mode [P _{SB}]	kW	0.024
Crankcase heater [P _{CK}]	kW	0.042
Off mode [P _{OFF}]	kW	0.024

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 9 of 59 www.tuvsud.com

TÜV®





Tdesignh(°C):	-10		Tbiv(°C):	-7		
Pdesignh(kW):	6.349		TOL(°C):	-10		
Test result A,	B, C, D, E, F	conditions	s:	•		
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load
E	6.349	4.996	2.05	0.90	1.00	2.05
F	5.617	5.617	2.30	0.90	1.00	2.30
А	5.617	5.617	2.30	0.90	1.00	2.30
В	3.419	3.520	3.75	0.90	0.97	3.75
С	2.198	4.147	4.79	0.90	0.53	4.40
D	0.977	4.800	6.35	0.90	0.20	4.56

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	3.61
SCOP:	kWh/kWh	3.60
Q _H :	kWh/year	13118
Q _{HE} :	kWh/year	3642
$\eta_{s,h}$	%	141.1
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 1)	1	A++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 10 of 59 www.tuvsud.com

 $T\ddot{U}V^{\mathbb{B}}$





Table 3.	Heating mode (Low temperature application):								•	
Model	CGK-040V4P	CGK-040V4P								
Product type	Air to Water	Heating season	V	Average		Warm	er		Colder	
1. Test condi	tions:									
	F	Part Load Ra	tio		la a	Outdoo		_		r heat
Condition	Form	in %	Δν	verage		at excha				anger let water
	1 0111	idia		imates		nperatur				ures (°C)
А	(-7-16)/(Tde	esignh-16)		88		-7(-8)	1		a /	34
В	(+2-16)/ (Td	esignh-16)		54		2(1)			a /	30
С	(+7-16)/(Tde	esignh-16)		35		7(6)			a /	27
D	(+12-16)/(Td	lesignh-16)		15		12(11))		a /	24
E	(TOL	16)/ (Tdesig	nh-16	5)		TOL			a/:	35.3
F	(Tbival	ent-16)/(Tde	signh-	16)	Tbiv				a / 34	
G	(-15-16)/(Td	esignh-16)		N/A	-15			N/A		
Remark: a) With conditions, the conditions at 2.Tested data	capacity is 8.00	8kW, the po	wer is						en in Eiv 145 i	1-2 at 30/35
General test	Unit	A(-7)/W34		2/W30	A7/W2	27 1	Δ12/ ¹	W24	A(-10)/	A(-7)/W34
conditions/ Part-Load	OTIL	(88%)		54%)	(35%		(15		W35.3 (100%)	(88%)
		А		В	С		D)	Е	F
Data collection period	hh: min:sec	3:00:00	1:	:10:00	1:10:0	00	1:10	:00	3:00:00	3:00:00
The heat pump defrosts		Yes		No	No		N	0	Yes	Yes
Electrical Prop	erties	•				<u>-</u>			-	-
Voltage	V	400.3	4	401.0	401.1	1	401	.1	400.3	400.3
Current input of the unit	А	4.29		1.85	1.50	1.	1.4	10	0 4.55 4.2	
Power input of the unit	kW	2.298	(0.898	0.694	4	0.6	22	2.454	2.298
Compressor frequency	Hz	78		35	30		3)	83	78

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 11 of 59 www.tuvsud.com

---- (®

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch



Test conditions	s User Side						
Water flow	m³/h	1.40	1.40	1.40	1.40	1.40	1.40
Inlet Water temperature	°C	29.32	27.23	25.33	23.27	30.93	29.32
Outlet Water temperature	°C	33.55*	29.94	9.94 28.06 26.41 35.02			
Test conditions	s Source Side						
Barometric pressure	kPa	101.02	101.01	101.01	101.02	101.01	101.02
Air inlet temperature, DB	°C	-6.98	2.01	7.00	12.00	-9.99	-6.98
Air inlet temperature, WB	°C	-7.93	1.03	6.01	10.99	-11.03	-7.93
Summary of th	e results						
Total heating capacity	kW	6.845	4.394	4.423	5.085	6.613	6.845
Effective power input	kW	2.293	0.892	0.689	0.617	2.449	2.293
Coefficient of performance (COP)	kW/kW	2.99	4.92	6.42	8.24	2.70	2.99

Remark: * In part condition, outlet temperature data is recorded by the full average complete cycle's data.

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.030
Standby mode [P _{SB}]	kW	0.024
Crankcase heater [P _{CK}]	kW	0.043
Off mode [P _{OFF}]	kW	0.024

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 12 of 59 www.tuvsud.com

TÜV®



	1	for SCOP:		1		
Tdesignh(°C):	-10		Tbiv(°C):	-7		
Pdesignh(kW):	7.738		TOL(°C):	-10		
Test result A,	B, C, D, E, F	conditions	s :			
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load
E	7.738	6.613	2.70	0.90	1.00	2.70
F	6.845	6.845	2.99	0.90	1.00	2.99
А	6.845	6.845	2.99	0.90	1.00	2.99
В	4.167	4.394	4.92	0.90	0.95	4.92
С	2.678	4.423	6.42	0.90	0.61	6.03
D	1.190	5.085	8.24	0.90	0.23	6.21

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	4.80
SCOP:	kWh/kWh	4.78
Q _H :	kWh/year	15986
Q _{HE} :	kWh/year	3345
$\eta_{s,h}$	%	188.2
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 2)		A+++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 13 of 59

www.tuvsud.com





Table 4.	Heating mode (Medium temperature application):								•	
Model	CGK-040V4P	CGK-040V4P								
Product type	Air to Water	Heating season	V	Average		Warm	ner		Colder	
1. Test condit	ions:									
	F	Part Load Ra	tio			Outdo				r heat
Condition	Form	in %	Δν	verage		at exchange dry (we				anger let water
	1 0111	idia		imates		nperatur				ures (°C)
А	(-7-16)/(Tde	esignh-16)		88		-7(-8))		a /	52
В	(+2-16)/ (Td	esignh-16)		54		2(1)			a /	42
С	(+7-16)/(Tde	esignh-16)		35		7(6)			a /	36
D	(+12-16)/(Td	lesignh-16)		15		12(11)		a /	30
Е	(TOL	16)/ (Tdesig	nh-16	i)		TOL			a/	55.3
F	(Tbival	ent-16)/(Tde	signh-	16)		Tbiv			a / 52	
G	(-15-16)/(Td	esignh-16)		N/A	-15			N/A		
Remark: a) With conditions, the conditions at 2.Tested data	capacity is 7.25	3kW, the po	wer is			•		_	en in EN1451	1-2 at 47/55
	Unit			2/W42	A7/W3	nc	A 4 O /	W30	A (40) /	A / 7\ /\/EQ
General test conditions/ Part-Load	Onit	A(-7)/W52 (88%)	(54%)		(35%		(15		A(-10)/ W55.3 (100%)	A(-7)/W52 (88%)
		А		В	С		С)	Е	F
Data collection period	hh: min:sec	3:00:00	1:	:10:00	1:10:0	00	1:10):00	3:00:00	3:00:00
The heat pump defrosts		Yes		No	No		N	0	Yes	Yes
Electrical Prop	erties	•		,		<u>-</u>			-	-
Voltage	V	400.1	4	400.9	401.0)	401	1.1	400.0	400.1
Current input of the unit	А	5.14		2.23	1.80		1.6	39	5.41 5.1	
Power input of the unit	kW	2.800	,	1.106	0.856	6	0.7	83	2.959	2.800
Compressor frequency	Hz	80		35	30		3	0	83	80

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 14 of 59 www.tuvsud.com



Test conditions	s User Side								
Water flow	m³/h	0.79	0.79	0.79	0.79	0.79	0.79		
Inlet Water temperature	°C	44.41	37.41	33.26	28.82	47.94	44.41		
Outlet Water temperature	°C	51.46	41.91	41.91 37.82 34.11 54.67					
Test conditions	s Source Side								
Barometric pressure	kPa	99.85	99.85	99.85	99.80	99.75	99.85		
Air inlet temperature, DB	°C	-6.97	2.00	7.00	12.00	-9.99	-6.97		
Air inlet temperature, WB	°C	-7.96	1.03	6.01	10.99	-11.08	-7.96		
Summary of th	e results								
Total heating capacity	kW	6.391	4.099	4.151	4.829	6.099	6.391		
Effective power input	kW	2.797	1.103	0.853	0.780	2.956	2.797		
Coefficient of performance (COP)	kW/kW	2.28	3.72	4.87	6.19	2.06	2.28		
Remark: * In pa	rt condition, ou	tlet temperat	ure data is recor	ded by the ful	l average com	olete cycle's o	data.		

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.030
Standby mode [P _{SB}]	kW	0.024
Crankcase heater [P _{CK}]	kW	0.043
Off mode [P _{OFF}]	kW	0.024

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 15 of 59 www.tuvsud.com

TI"N/®





3.Calculation	/conclusion	for SCOP:								
Tdesignh(°C):	-10		Tbiv(°C):	-7	-7					
Pdesignh(kW):	7.225		TOL(°C):	-10						
Test result A,	B, C, D, E, F	conditions	s:	•						
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load				
E	7.225	6.099	2.06	0.90	1.00	2.06				
F	6.391	6.391	2.28	0.90	1.00	2.28				
А	6.391	6.391	2.28	0.90	1.00	2.28				
В	3.890	4.099	3.72	0.90	0.95	3.72				
С	2.501	4.151	4.87	0.90	0.60	4.56				
D	1.112	4.829	6.19	0.90	0.23	4.64				

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	3.64
SCOP:	kWh/kWh	3.63
Q _H :	kWh/year	14927
Q _{HE} :	kWh/year	4116
$\eta_{s,h}$	%	142.0
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 1)		A++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 16 of 59 www.tuvsud.com

 $T\ddot{U}V^{\mathbb{B}}$





Table 5.	Heating mode (Low temperature application):								•		
Model	CGK-050V4P	CGK-050V4P									
Product type	Air to Water	Heating season	V	Average		Warm	ner		Colder		
1. Test condit	ions:										
	F	Part Load Ra	tio		la a	Outdo				r heat	
Condition	Form	in %	Δν	verage		at exchange t dry (we			}	anger let water	
		idia		imates		nperatur				ures (°C)	
А	(-7-16)/(Tde	esignh-16)		88		-7(-8))		a /	34	
В	(+2-16)/ (Td	esignh-16)		54		2(1)			a /	30	
С	(+7-16)/(Tde	esignh-16)		35		7(6)			a /	27	
D	(+12-16)/(Td	lesignh-16)		15		12(11)		a /	24	
E	(TOL	16)/ (Tdesig	nh-16	i)		TOL			a/:	35.3	
F	(Tbival	ent-16)/(Tde:	signh-	16)	Tbiv				a / 34		
G	(-15-16)/(Td	esignh-16)		N/A	-15			N/A			
Remark: a) With conditions, the conditions at 2.Tested data	capacity is 10.7	25kW, the p	ower is			_		_	en in Ein1451	1-2 at 30/35	
General test	Unit	A(-7)/W34		2/W30	A7/W2	77	Λ1 2 /	W24	A(-10)/	A(-7)/W34	
conditions/ Part-Load	Offit	(88%)	(54%)		(35%		(15		W35.3 (100%)	(88%)	
		А		В	С)	Е	F	
Data collection period	hh: min:sec	3:00:00	1:	:10:00	1:10:0	00	1:10	0:00	3:00:00	3:00:00	
The heat pump defrosts		Yes		No	No		N	0	Yes	Yes	
Electrical Prop	erties	•		,		<u>-</u>			-	-	
Voltage	V	400.6	4	401.6	401.8	3	40	1.9	400.6	400.6	
Current input of the unit	А	6.27		2.37	1.86		1.3	70	0 6.75 6.		
Power input of the unit	kW	3.515	,	1.205	0.906	ô	0.8	07	3.803	3.515	
Compressor frequency	Hz	85		35	30		3	0	85	85	

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 17 of 59 TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch



m³/h	1.82	1.82	1.82	1.82	1.82	1.82
°C	29.40	27.10	25.19	23.15	30.57	29.40
°C	33.60*	29.87	28.02	26.36	34.94*	33.60*
Source Side						
kPa	101.02	101.01	101.01	101.02	101.01	101.02
°C	-6.99	2.01	7.03	12.00	-10.00	-6.99
°C	-8.00	1.03	6.03	10.99	-11.09	-8.00
e results						
kW	9.361	5.828	5.957	6.755	9.198	9.361
kW	3.508	1.198	0.899	0.800	3.796	3.508
kW/kW	2.67	4.86	6.62	8.44	2.42	2.67
	°C °C s Source Side kPa °C °C °C e results kW kW	°C 29.40 °C 33.60* Source Side kPa 101.02 °C -6.99 °C -8.00 Peresults kW 9.361 kW 3.508 kW/kW 2.67	°C 29.40 27.10 °C 33.60* 29.87 Source Side kPa 101.02 101.01 °C -6.99 2.01 °C -8.00 1.03 Peresults kW 9.361 5.828 kW 3.508 1.198 kW/kW 2.67 4.86	°C 29.40 27.10 25.19 °C 33.60* 29.87 28.02 Source Side kPa 101.02 101.01 101.01 °C -6.99 2.01 7.03 °C -8.00 1.03 6.03 Peresults kW 9.361 5.828 5.957 kW 3.508 1.198 0.899 kW/kW 2.67 4.86 6.62	°C 29.40 27.10 25.19 23.15 °C 33.60* 29.87 28.02 26.36 Source Side kPa 101.02 101.01 101.01 101.02 °C -6.99 2.01 7.03 12.00 °C -8.00 1.03 6.03 10.99 e results kW 9.361 5.828 5.957 6.755 kW 3.508 1.198 0.899 0.800 kW/kW 2.67 4.86 6.62 8.44	°C 29.40 27.10 25.19 23.15 30.57 °C 33.60* 29.87 28.02 26.36 34.94* Source Side kPa 101.02 101.01 101.01 101.02 101.01 °C -6.99 2.01 7.03 12.00 -10.00 °C -8.00 1.03 6.03 10.99 -11.09 Presults kW 9.361 5.828 5.957 6.755 9.198 kW 3.508 1.198 0.899 0.800 3.796

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.036
Standby mode [P _{SB}]	kW	0.025
Crankcase heater [P _{CK}]	kW	0.038
Off mode [P _{OFF}]	kW	0.025

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 18 of 59 www.tuvsud.com

 $TUV^{\mathbb{B}}$



3.Calculation/conclusion for SCOP:									
Tdesignh(°C):	-10		Tbiv(°C):	-7					
Pdesignh(kW):	10.582		TOL(°C):	-10					
Test result A,	B, C, D, E, F	conditions	S:						
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load			
Е	10.582	9.198	2.42	0.90	1.00	2.42			
F	9.361	9.361	2.67	0.90	1.00	2.67			
А	9.361	9.361	2.67	0.90	1.00	2.67			
В	5.698	5.828	4.86	0.90	0.98	4.86			
С	3.663	5.957	6.62	0.90	0.61	6.23			
D	1.628	6.755	8.44	0.90 0.24 6.42					
CR: part load div	vided by capac	ity;		•					

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	4.72
SCOP:	kWh/kWh	4.71
Q _H :	kWh/year	21862
Q _{HE} :	kWh/year	4643
$\eta_{s,h}$	%	185.3
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 2)		A+++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 19 of 59 www.tuvsud.com

TÜV®





Table 6.	Heating mode (Medium temperature application):								ı	•
Model	CGK-050V4P									
Product type	Air to Water	Heating season	V	Average	□ Warmer □				Colder	
1. Test condit	ions:									
Condition	F	Part Load Ra in %	itio		hea		door chang	er		r heat anger
Condition	Form	ıula		verage imates		-	(wet) b ature (°			let water ures (°C)
А	(-7-16)/(Tde	esignh-16)		88		-7	(-8)		a /	52
В	(+2-16)/ (Td	esignh-16)		54		2	(1)		a /	42
С	(+7-16)/(Tde	esignh-16)		35		7	(6)		a /	36
D	(+12-16)/(Td	lesignh-16)		15		12	(11)		a /	30
Е	(TOL	-16)/ (Tdesig	nh-16	;)		Т	OL		a / 55.3	
F	(Tbival	ent-16)/(Tdes	signh-	16)	Tbiv			a / 52		
G	(-15-16)/(Td	esignh-16)		N/A	-15				N/A	
Remark: a) With conditions, the o	capacity is 9.63	31kW, the po	wer is						en in EN1451	1-2 at 47/55
2.Tested data	·								I	I\ a
General test conditions/ Part-Load	Unit	A(-7)/W52 (88%)		2/W42 (54%)	A7/W3 (35%			/W30 5%)	A(-10)/ W55.3 (100%)	A(-7)/W52 (88%)
		А		В	С		I)	Е	F
Data collection period	hh: min:sec	3:00:00	1	:10:00	1:10:0	00	1:1	0:00	1:10:00	3:00:00
The heat pump defrosts		Yes		No	No		١	lo	No	Yes
Electrical Prop	erties	•	<u>-</u>						-	-
Voltage	V	400.4	4	401.6	401.7	7	40	1.8	400.3	400.4
Current input of the unit	А	6.57		2.87			2.	05	7.81	6.57
Power input of the unit	kW	3.765		1.478	1.124	1	0.9	996	4.501	3.765
Compressor frequency	Hz	85		35	30		3	80	85	85

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 20 of 59 www.tuvsud.com

<u>m</u> Gu





Test condition	s User Side						
Water flow	m³/h	1.04	1.04	1.04	1.04	1.04	1.04
Inlet Water temperature	°C	44.60	37.47	33.22	28.68	47.38	44.60
Outlet Water temperature	°C	51.72*	42.01	37.82	34.00	55.11	51.72*
Test condition	s Source Side			-			
Barometric pressure	kPa	99.85	99.85	99.85	99.80	99.75	99.85
Air inlet temperature, DB	°C	-6.99	2.01	7.00	12.00	-9.99	-6.99
Air inlet temperature, WB	°C	-7.94	1.03	6.01	10.99	-11.08	-7.94
Summary of th	e results						
Total heating capacity	kW	8.505	5.429	5.528	6.387	9.222	8.505
Effective power input	kW	3.761	1.474	1.120	0.992	4.496	3.761
Coefficient of performance (COP)	kW/kW	2.26	3.68	4.93	6.44	2.05	2.26

Remark: * In part condition, outlet temperature data is recorded by the full average complete cycle's data.

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.036
Standby mode [P _{SB}]	kW	0.025
Crankcase heater [P _{CK}]	kW	0.038
Off mode [P _{OFF}]	kW	0.025

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 21 of 59 www.tuvsud.com

TÜV®





Tdesignh(°C):	-10		Tbiv(°C):	°C): -7				
Pdesignh(kW):	9.615		TOL(°C):	-10	-10			
Test result A,	B, C, D, E, F	conditions	3:	•				
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load		
E	9.615	9.222	2.05	0.90	1.00	2.05		
F	8.505	8.505	2.26	0.90	0.90 1.00 2.26			
А	8.505	8.505	2.26	0.90	1.00	2.26		
В	5.177	5.429	3.68	0.90	0.95	3.68		
С	3.328	5.528	4.93	0.90	0.60	4.63		
D	1.479	6.387	6.44	0.90 0.23 4.84				

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	3.65
SCOP:	kWh/kWh	3.64
Q _H :	kWh/year	19864
Q _{HE} :	kWh/year	5458
$\eta_{s,h}$	%	142.6
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 1)		A++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 22 of 59 www.tuvsud.com

 $T\ddot{U}V^{\mathbb{B}}$





Table 7.	Heating mode (Low temperature application):							Р			
Model	CGK-060V4P										
Product type	Air to Water	Heating season	7	Average		Warm	er 🗆]	Colder		
1. Test condi	tions:										
	F	Part Load Ra	atio		la a	Outdoo			Indoor heat		
Condition	Form	in % nula	A	verage		at excha			+	anger let water	
				imates		nperature				ures (°C)	
А	(-7-16)/(Tde	esignh-16)		88		-7(-8)			a /	34	
В	(+2-16)/ (Td	esignh-16)		54		2(1)			a /	30	
С	(+7-16)/(Td	esignh-16)		35		7(6)			a /	27	
D	(+12-16)/(To	lesignh-16)		15		12(11))		a /	24	
Е	(TOL	-16)/ (Tdesią	gnh-16	5)		TOL			a/:	35.3	
F	(Tbival	ent-16)/(Tde	signh-	16)	Tbiv				a / 34		
G	(-15-16)/(Td	esignh-16)		N/A	-15				N/A en in EN14511-2 at 30/35		
conditions, the c					,						
General test conditions/ Part-Load	Unit	A(-7)/W34 (88%)		2/W30 (54%)	A7/W2 (35%		\12/W24 (15%)	4	A(-10)/ W35.3 (100%)	A(-7)/W34 (88%)	
		А		В	С		D		Е	F	
Data collection period	hh: min:sec	3:00:00	1	:10:00	1:10:0	00	1:10:00		3:00:00	3:00:00	
The heat pump defrosts		Yes		No	No		No		Yes	Yes	
Electrical Prop	erties	-			5				•	-	
Voltage	V	400.5	4	400.0	401.7	7	401.8		400.5	400.5	
Current input of the unit	А	6.81		2.84	2.27 2.02			6.95	6.81		
Power input of the unit	kW	3.876		1.410	1.129	9	0.985		3.965	3.876	
Compressor frequency	Hz	85		35	30		30		85	85	

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 23 of 59 www.tuvsud.com

TI"N/®



Test conditions	s User Side						
Water flow	m³/h	2.20	2.20	2.20	2.20	2.20	2.20
Inlet Water temperature	°C	29.14	27.18	25.26	23.23	30.55	29.14
Outlet Water temperature	°C	33.56*	29.88	28.06	26.38	34.95*	33.56*
Test conditions	Source Side	•				-	
Barometric pressure	kPa	101.02	101.01	101.01	101.02	101.01	101.02
Air inlet temperature, DB	°C	-6.94	2.01	7.01	12.01	-9.94	-6.94
Air inlet temperature, WB	°C	-7.95	1.00	6.01	10.99	-10.96	-7.95
Summary of the	e results						
Total heating capacity	kW	11.235	6.894	7.113	8.023	11.178	11.235
Effective power input	kW	3.869	1.403	1.122	0.978	3.957	3.869
Coefficient of performance (COP)	kW/kW	2.90	4.92	6.34	8.21	2.82	2.90
Remark: * In pa	rt condition, ou	tlet temperat	ure data is recor	ded by the ful	l average comp	olete cycle's	data.

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.035
Standby mode [P _{SB}]	kW	0.025
Crankcase heater [P _{CK}]	kW	0.039
Off mode [P _{OFF}]	kW	0.025

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 24 of 59 www.tuvsud.com

TÜV®



3.Calculation/conclusion for SCOP:								
Tdesignh(°C):	-10		Tbiv(°C):	-7				
Pdesignh(kW):	12.700		TOL(°C):	-10				
Test result A, B, C, D, E, F conditions:								
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load		
E	12.700	11.178	2.82	0.90	1.00	2.82		
F	11.235	11.235	2.90	0.90	1.00	2.90		
А	11.235	11.235	2.90	0.90	1.00	2.90		
В	6.838	6.894	4.92	0.90	0.99	4.92		
С	4.396	7.113	6.34	0.90	0.62	5.97		
D	1.954	8.023	8.21	0.90	0.24	6.26		
CR: part load divided by capacity;								

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	4.77
SCOP:	kWh/kWh	4.76
Q _H :	kWh/year	26238
Q _{HE} :	kWh/year	5510
$\eta_{s,h}$	%	187.5
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 2)	1	A+++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 25 of 59 www.tuvsud.com

 $TUV^{\mathbb{B}}$





Table 8.	Heating mode (Medium temperature application):							ı	•	
Model	CGK-060V4P	CGK-060V4P								
Product type	Air to Water	Heating season	~	Average		Wa	armer		Colder	
1. Test condit	ions:									
Condition	F	Part Load Ra in %	itio		hea		door chang	er		r heat anger
Condition	Form	ıula		verage imates		-	(wet) b ature (°			let water ures (°C)
А	(-7-16)/(Tde	signh-16)		88		-7	(-8)		a /	52
В	(+2-16)/ (Td	esignh-16)		54		2	(1)		a /	42
С	(+7-16)/(Tde	esignh-16)		35		7	(6)		a /	36
D	(+12-16)/(Td	esignh-16)		15		12	(11)		a /	30
Е	(TOL	-16)/ (Tdesig	gnh-16	;)		Т	OL		a/	55.3
F	(Tbival	ent-16)/(Tdes	signh-	gnh-16) Tbiv				a / 52		
G	(-15-16)/(Td	esignh-16)		N/A	-15			N/A		
Remark: a) With conditions, the o	capacity is 11.4	89kW, the po	ower i						en in EN1451	1-2 at 47/55
2.Tested data	·								I	I\ a
General test conditions/ Part-Load	Unit	A(-7)/W52 (88%)		2/W42 (54%)	A7/W3 (35%			W30 5%)	A(-10)/ W55.3 (100%)	A(-7)/W52 (88%)
		А		В	С		I)	Е	F
Data collection period	hh: min:sec	3:00:00	1	:10:00	1:10:0	00	1:1	0:00	1:10:00	3:00:00
The heat pump defrosts		Yes		No	No		١	lo	No	Yes
Electrical Prop	erties		<u>-</u>						-	-
Voltage	V	400.0	4	401.4	401.7	7	40	1.7	400.0	400.0
Current input of the unit	А	8.14		3.23	2.58		2.	39	8.41	8.14
Power input of the unit	kW	4.743		1.691	1.31	1	1.′	84	4.924	4.743
Compressor frequency	Hz	84		35	30		3	0	85	84

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 26 of 59 www.tuvsud.com



Test condition	s User Side						
Water flow	m³/h	1.25	1.25	1.25	1.25	1.25	1.25
Inlet Water temperature	°C	44.27	37.52	33.22	28.58	48.01	44.27
Outlet Water temperature	°C	51.48*	41.98	37.78	33.82	55.10	51.48*
Test condition	s Source Side	•			-	-	
Barometric pressure	kPa	99.85	99.85	99.85	99.80	99.75	99.85
Air inlet temperature, DB	°C	-6.95	2.00	7.00	12.00	-9.99	-6.95
Air inlet temperature, WB	°C	-7.92	1.03	6.01	11.00	-10.92	-7.92
Summary of th	e results						
Total heating capacity	kW	10.359	6.417	6.567	7.570	10.164	10.359
Effective power input	kW	4.738	1.686	1.306	1.179	4.919	4.738
Coefficient of performance (COP)	kW/kW	2.19	3.81	5.03	6.42	2.07	2.19

Remark: * In part condition, outlet temperature data is recorded by the full average complete cycle's data.

Electric power consumptions	Unit	Value	
Thermostat-off mode [P _{TO}]	kW	0.035	
Standby mode [P _{SB}]	kW	0.025	
Crankcase heater [P _{CK}]	kW	0.039	
Off mode [P _{OFF}]	kW	0.025	

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 27 of 59 www.tuvsud.com



3.Calculation/conclusion for SCOP:									
Tdesignh(°C):	-10		Tbiv(°C):	-7	-7				
Pdesignh(kW):	11.710		TOL(°C):	-10					
Test result A, B, C, D, E, F conditions:									
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load			
E	11.710	10.164	2.07	0.90	1.00	2.07			
F	10.359	10.359	2.19	0.90	1.00	2.19			
А	10.359	10.359	2.19	0.90	1.00	2.19			
В	6.305	6.417	3.81	0.90	0.98	3.81			
С	4.053	6.567	5.03	0.90	0.62	4.73			
D	1.801	7.570	6.42	0.90	0.24	4.86			

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	3.70
SCOP:	kWh/kWh	3.69
Q _H :	kWh/year	24192
Q _{HE} :	kWh/year	6550
$\eta_{s,h}$	%	144.7
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 1)		A++

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 28 of 59 www.tuvsud.com

TÜV®



Appendix I Test results

Sound power level	Р						
CGK-030V4P	CGK-030V4P						
Product type :			Air to Water				
Outdoor heat exchai	nger, Air temperature D	DB/WB (°C):	7.0 / 6.0				
Indoor heat exchang	er, Water inlet/outlet te	emperature (°C):	30.0 / 35.0				
Voltage (V):			400				
Frequency (Hz):			50				
Working condition cl	ing condition class:						
Acoustical environm	ent :	Hemi-anechoic room					
Windshield type :			Sponge				
Measured position a	mount :		14				
Water flow (m³/h):			1.31				
sured quantity	L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark				
ssure level $\overline{L}_{p(ST)}^{****}$		46					
ent distance d *		1.0m					
er level L _{wA} ****		60					
	CGK-030V4P Product type: Outdoor heat exchang Indoor heat exchang Voltage (V): Frequency (Hz): Working condition cl Acoustical environm Windshield type: Measured position a Water flow (m³/h): sured quantity estimate the sure of	CGK-030V4P Product type: Outdoor heat exchanger, Air temperature Description of the product type: Indoor heat exchanger, Water inlet/outlet temperature Description of the product temperature Description of the	Product type: Outdoor heat exchanger, Air temperature DB/WB (°C): Indoor heat exchanger, Water inlet/outlet temperature (°C): Voltage (V): Frequency (Hz): Working condition class: Acoustical environment: Windshield type: Measured position amount: Water flow (m³/h): sured quantity LwA,indoors (dB(A)) LwA,outdoors (dB(A)) sure level Lp(ST)**** 46 ent distance d * 1.0m				

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 590 r/min, compressor frequency: 58Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 29 of 59

www.tuvsud.com



Appendix I Test results

Table 9b.	Sound power level	Sound power level measurement (Medium temperature application)						
Model	CGK-030V4P	CGK-030V4P						
	Product type :			Air to Water				
	Outdoor heat exchar	nger, Air temperature D	DB/WB (°C):	7.0 / 6.0				
	Indoor heat exchang	er, Water inlet/outlet te	emperature (°C):	47.0 / 55.0				
	Voltage (V):			400				
	Frequency (Hz):			50				
	Working condition cl	ass:	Class A					
	Acoustical environm	ent :	Hemi-anechoic room					
	Windshield type :			Sponge				
	Measured position a	mount :		14				
	Water flow (m³/h):			0.75				
Mea	sured quantity	L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark				
Sound pressure level $\overline{L}_{p(ST)}^{****}$			47					
Measureme	ent distance d *		1.0m					
Sound pow	er level L _{wA} ****		60					

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 580 r/min, compressor frequency: 58Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 30 of 59





Appendix I Test results

Table 10a.	Sound power level	Р						
Model	CGK-040V4P	CGK-040V4P						
	Product type :			Air to Water				
	Outdoor heat exchar	nger, Air temperature D	DB/WB (°C):	7.0 / 6.0				
	Indoor heat exchang	er, Water inlet/outlet te	emperature (°C):	30.0 / 35.0				
	Voltage (V):			400				
	Frequency (Hz):			50				
	Working condition cl	Working condition class :						
	Acoustical environm	ent :		Hemi-anechoic room				
	Windshield type :			Sponge				
	Measured position a	mount :		14				
	Water flow (m³/h):			1.40				
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark				
Sound pressure level $\bar{L}_{p(ST)}^{****}$			47					
Measurement distance d *			1.0m					
Sound power	er level L _{wA} ****		62					

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 590 r/min, compressor frequency: 64Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 31 of 59







Appendix I Test results

Table 10b.	Sound power level	Sound power level measurement (Medium temperature application)						
Model	CGK-040V4P	CGK-040V4P						
	Product type :			Air to Water				
	Outdoor heat exchar	nger, Air temperature D	DB/WB (°C):	7.0 / 6.0				
	Indoor heat exchang	er, Water inlet/outlet te	emperature (°C):	47.0 / 55.0				
	Voltage (V):			400				
	Frequency (Hz):			50				
	Working condition cl	ass :	Class A					
	Acoustical environme	ent :	Hemi-anechoic room					
	Windshield type :			Sponge				
	Measured position a	mount :		14				
	Water flow (m³/h):			0.79				
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark				
Sound pressure level $\bar{L}_{p(ST)}^{****}$			45					
Measureme	nt distance d *		1.0m					
Sound power	er level L _{wA} ****		60					

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 530 r/min, compressor frequency: 56Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 32 of 59

www.tuvsud.com



Appendix I Test results

Table 11a.	Sound power level	Р						
Model	CGK-050V4P	CGK-050V4P						
	Product type :			Air to Water				
	Outdoor heat exchar	nger, Air temperature D	DB/WB (°C):	7.0 / 6.0				
	Indoor heat exchang	er, Water inlet/outlet to	emperature (°C):	30.0 / 35.0				
	Voltage (V):			400				
	Frequency (Hz):			50				
	Working condition cl	orking condition class :						
	Acoustical environme	ent :		Hemi-anechoic room				
	Windshield type :			Sponge				
	Measured position a	mount :		14				
	Water flow (m³/h):			1.82				
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark				
Sound pressure level $\bar{L}_{p(ST)}^{****}$			46					
Measureme	nt distance d *		1.0m					
Sound power	er level L _{wA} ****		60					

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 518 r/min, compressor frequency: 60Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 33 of 59 www.tuvsud.com

TÜV®



Appendix I Test results

Table 11b.	Sound power level measurement (Medium temperature application)			Р		
Model	CGK-050V4P					
	Product type :	Air to Water				
	Outdoor heat exchanger, Air temperature DB/WB (°C):			7.0 / 6.0		
	Indoor heat exchang	er, Water inlet/outlet temperature (°C):		47.0 / 55.0		
	Voltage (V):			400		
	Frequency (Hz):			50		
	Working condition class :			Class A		
	Acoustical environment :			Hemi-anechoic room		
	Windshield type :			Sponge		
	Measured position amount :			14		
	Water flow (m³/h):			1.04		
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark		
Sound pressure level $\bar{L}_{p(ST)}^{****}$			47			
Measurement distance d *			1.0m			
Sound power level L _{wA} ****			62			

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 490 r/min, compressor frequency: 60Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 34 of 59



---- (B



Appendix I Test results

Table 12a.	Sound power level	Р				
Model	CGK-060V4P					
	Product type :	Air to Water				
	Outdoor heat exchar	7.0 / 6.0				
	Indoor heat exchang	30.0 / 35.0				
	Voltage (V):			400		
	Frequency (Hz):			50		
	Working condition class :			Class A		
	Acoustical environment :			Hemi-anechoic room		
	Windshield type :	Sponge				
	Measured position a	14				
	Water flow (m³/h):	2.20				
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark		
Sound pressure level $\overline{L}_{p(ST)}^{****}$			46			
Measurement distance d *			1.0m			
Sound power level L _{wA} ****			61			

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 490 r/min, compressor frequency: 60Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 35 of 59 www.tuvsud.com

TÜV®



Appendix I Test results

Table 12b.	Sound power level measurement (Medium temperature application)			Р		
Model	CGK-060V4P					
	Product type :	Air to Water				
	Outdoor heat exchanger, Air temperature DB/WB (°C):			7.0 / 6.0		
	Indoor heat exchanger, Water inlet/outlet temperature (°C):			47.0 / 55.0		
	Voltage (V):			400		
	Frequency (Hz):			50		
	Working condition class :			Class A		
	Acoustical environment :			Hemi-anechoic room		
	Windshield type :			Sponge		
	Measured position amount :			14		
	Water flow (m³/h):			1.25		
Measured quantity		L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark		
Sound pressure level $\bar{L}_{p(ST)}^{****}$			46			
Measurement distance d *			1.0m			
Sound power level L _{wA} ****			61			

Setting of controls: according to user manual.

Duct connection:--

Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer

Fan speed: 480 r/min, compressor frequency: 60Hz.

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 36 of 59





Table 13.	Clause 4 of EN 14511-4:2022	
Model:	CGK-030V4P	
TEST 1	STARTING TEST (§4.2.1.2 Table 3)	

Requirement: The "lower" starting operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -24.76 °C, T in water = 9.97 °C, Flow rate 0.68 m³/h have been set and obtained. At those conditions, the machine was switched on.

Observation/ Evaluation: It started without any problem and worked for 30 minutes without showing any warning or alarm. During the test the machine operated in auto mode. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 2 OPERATING TEST (§4.2.1.2 Table 3)

Requirement: From the machine "lower" starting conditions - i.e. - the machine was brought to the lower operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.00 °C, T in water = 52.00 °C, Flow rate 0.68 m³/h. Once these conditions were obtained, the machine was let operate for over 1 hour in auto mode.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 3 SHUTTING OFF WATER FLOW (§ 4.5)

Requirement: The water flow rate was shuted off through manual and automatic valves of the test rig. The machine switched off and only the flow switch Protection appeared on the user interface of indoor unit.

Observation/ Evaluation: Perform error reset operation, once the water flow rate was restored, the machine restarted automatically and worked for 30 minutes normally. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 4 SHUTTING OFF AIR FLOW (§ 4.5)

Requirement: The air flow rate was shutted off through a plastic sheet and a panel. The machine never turned off. It continued to operate with continuous frosting and defrosting cycles. After more than half an hour, the air flow rate was restored and the machine started to operate normally.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 5 COMPLETE POWER SUPPLY FAILURE (§ 4.6)

Requirement: The power supply was cut off for about 5 seconds.

Observation/ Evaluation: The unit restarted automatically within about 3 minutes after the power supply was reactivated.

Test Response: Pass

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 37 of 59



5F&



Table 14.	Clause 4 of EN 14511-4:2022	
Model:	CGK-040V4P	
TEST 1	STARTING TEST (§4.2.1.2 Table 3)	

Requirement: The "lower" starting operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.07 °C, T in water = 9.27 °C, Flow rate 0.71 m³/h have been set and obtained. At those conditions, the machine was switched on.

Observation/ Evaluation: It started without any problem and worked for 30 minutes without showing any warning or alarm. During the test the machine operated in auto mode. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 2 OPERATING TEST (§4.2.1.2 Table 3)

Requirement: From the machine "lower" starting conditions - i.e. - the machine was brought to the lower operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.00 °C, T in water = 51.13 °C, Flow rate 0.71 m³/h. Once these conditions were obtained, the machine was let operate for over 1 hour in auto mode.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 3 SHUTTING OFF WATER FLOW (§ 4.5)

Requirement: The water flow rate was shuted off through manual and automatic valves of the test rig. The machine switched off and only the flow switch Protection appeared on the user interface of indoor unit.

Observation/ Evaluation: Perform error reset operation, once the water flow rate was restored, the machine restarted automatically and worked for 30 minutes normally. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 4 SHUTTING OFF AIR FLOW (§ 4.5)

Requirement: The air flow rate was shutted off through a plastic sheet and a panel. The machine never turned off. It continued to operate with continuous frosting and defrosting cycles. After more than half an hour, the air flow rate was restored and the machine started to operate normally.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 5 COMPLETE POWER SUPPLY FAILURE (§ 4.6)

Requirement: The power supply was cut off for about 5 seconds.

Observation/ Evaluation: The unit restarted automatically within about 3 minutes after the power supply was reactivated.

Test Response: Pass

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 38 of 59 www.tuvsud.com

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Table 15.	Clause 4 of EN 14511-4:2022	
Model:	CGK-050V4P	
TEST 1	STARTING TEST (§4.2.1.2 Table 3)	

Requirement: The "lower" starting operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.02 °C, T in water = 8.60 °C, Flow rate 0.93 m³/h have been set and obtained. At those conditions, the machine was switched on.

Observation/ Evaluation: It started without any problem and worked for 30 minutes without showing any warning or alarm. During the test the machine operated in auto mode. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 2 OPERATING TEST (§4.2.1.2 Table 3)

Requirement: From the machine "lower" starting conditions - i.e. - the machine was brought to the lower operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.00 °C, T in water = 50.89 °C, Flow rate 0.93 m³/h. Once these conditions were obtained, the machine was let operate for over 1 hour in auto mode.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 3 SHUTTING OFF WATER FLOW (§ 4.5)

Requirement: The water flow rate was shuted off through manual and automatic valves of the test rig. The machine switched off and only the flow switch Protection appeared on the user interface of indoor unit.

Observation/ Evaluation: Perform error reset operation, once the water flow rate was restored, the machine restarted automatically and worked for 30 minutes normally. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 4 SHUTTING OFF AIR FLOW (§ 4.5)

Requirement: The air flow rate was shutted off through a plastic sheet and a panel. The machine never turned off. It continued to operate with continuous frosting and defrosting cycles. After more than half an hour, the air flow rate was restored and the machine started to operate normally.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 5 COMPLETE POWER SUPPLY FAILURE (§ 4.6)

Requirement: The power supply was cut off for about 5 seconds.

Observation/ Evaluation: The unit restarted automatically within about 3 minutes after the power supply was reactivated.

Test Response: Pass

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 39 of 59 www.tuvsud.com



Table 16.	able 16. Clause 4 of EN 14511-4:2022	
Model:	Model: CGK-060V4P	
TEST 1	STARTING TEST (§4.2.1.2 Table 3)	

Requirement: The "lower" starting operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.05 °C, T in water = 8.48 °C, Flow rate 1.12 m³/h have been set and obtained. At those conditions, the machine was switched on.

Observation/ Evaluation: It started without any problem and worked for 30 minutes without showing any warning or alarm. During the test the machine operated in auto mode. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 2 OPERATING TEST (§4.2.1.2 Table 3)

Requirement: From the machine "lower" starting conditions - i.e. - the machine was brought to the lower operating conditions declared by the manufacturer for the heating mode- i.e. Tair= -25.00 °C, T in water = 50.68 °C, Flow rate 1.12 m³/h. Once these conditions were obtained, the machine was let operate for over 1 hour in auto mode.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 3 SHUTTING OFF WATER FLOW (§ 4.5)

Requirement: The water flow rate was shuted off through manual and automatic valves of the test rig. The machine switched off and only the flow switch Protection appeared on the user interface of indoor unit.

Observation/ Evaluation: Perform error reset operation, once the water flow rate was restored, the machine restarted automatically and worked for 30 minutes normally. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 4 SHUTTING OFF AIR FLOW (§ 4.5)

Requirement: The air flow rate was shutted off through a plastic sheet and a panel. The machine never turned off. It continued to operate with continuous frosting and defrosting cycles. After more than half an hour, the air flow rate was restored and the machine started to operate normally.

Observation/ Evaluation: During the test, no waring or alarm were showed. No damage was recorded on the machine during and after the test.

Test Response: Pass

TEST 5 COMPLETE POWER SUPPLY FAILURE (§ 4.6)

Requirement: The power supply was cut off for about 5 seconds.

Observation/ Evaluation: The unit restarted automatically within about 3 minutes after the power supply was reactivated.

Test Response: Pass

Project No: 64.181.23.03037.01


Rev.: 00 Date: 2023-11-07 Page: 40 of 59 www.tuvsud.com





Nameplate

Model: CGK-030V4P

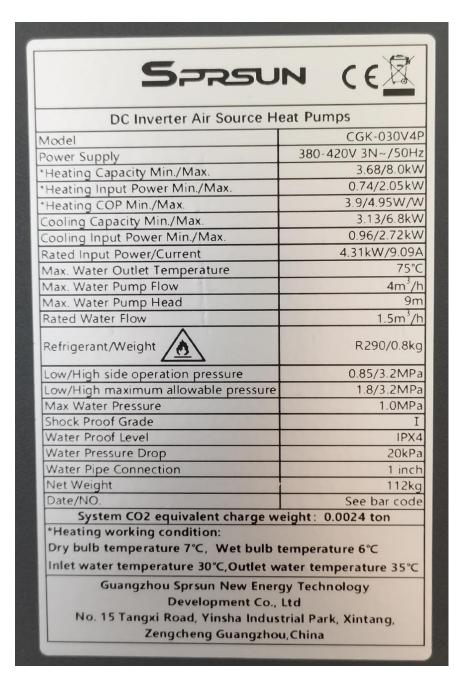

Project No: 64.181.23.03037.01


Rev.: 00 Date: 2023-11-07 Page: 41 of 59 www.tuvsud.com





Nameplate

Model: CGK-040V4P

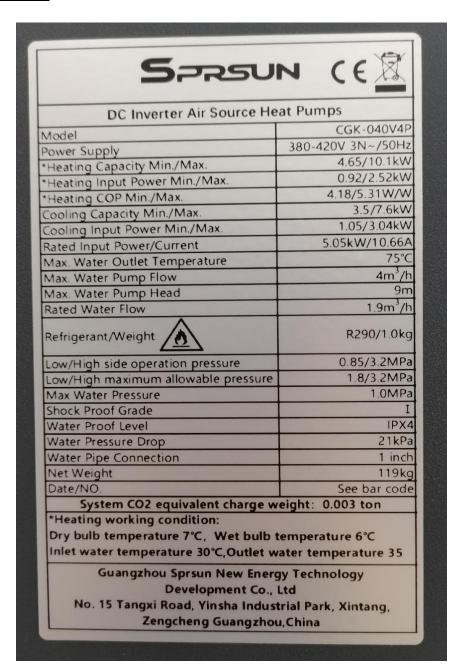

Project No: 64.181.23.03037.01


Rev.: 00 Date: 2023-11-07 Page: 42 of 59







Model: <u>CGK-050V4P</u>

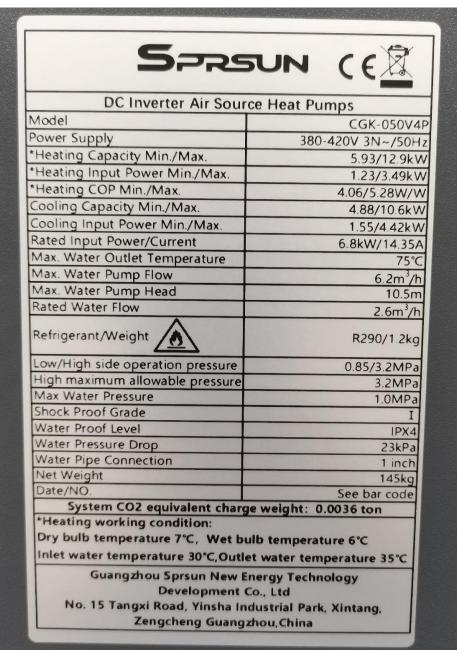

Project No: 64.181.23.03037.01


Rev.: 00 Date: 2023-11-07 Page: 43 of 59 www.tuvsud.com





Nameplate

Model: CGK-060V4P

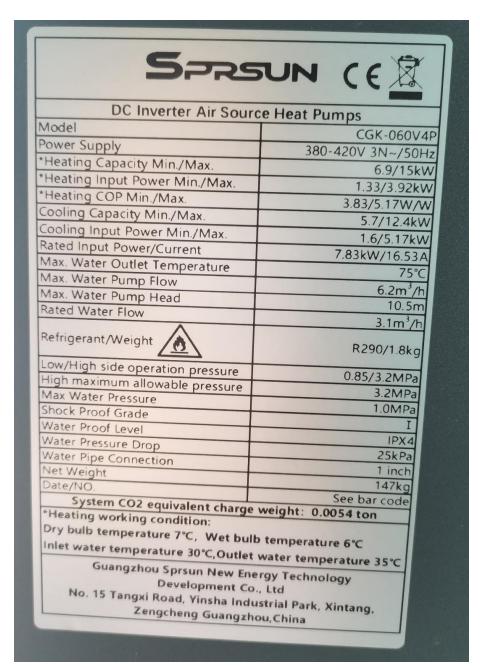

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 44 of 59



TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Details of:	Overall view for CGK-030V4P
View: General Front Rear Right Left Top Bottom	

Panasonic H420D7KZAAC6 COMPRESSOR DC MOTOR 280V SERIAL NO. K42W F0000030 7975739 R290 Panasonic Corporation 松下. 万宝 (广州) 压缩机有限公司 Made in China Panasonic Wanbao Appliances Compressor (Guangzhou) Co., Ltd. 36, Wanbao North Street, Wanbao Industry Zone, Zhongcun, Panyu District, Guangzhou City, Guangdong Province, China MARNING / DANCED
松下、万宝(广州) 压缩机有限公司 Made in China Panasonic Wanbao Appliances Compressor (Guangzhou) Co., Ltd. 36. Wanbao North Street, Wanbao Industry Zone, Zhongcun, Panyu District, Guangzhou City, Guangdong Province, China **

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 45 of 59

www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Details of:	Fan Motor for CGK-030V4P
View: ☐ General	WOLONG 空间用无料直接电动机 Q.C.PASS 99 RoHS 2
☐ Front	ZWB278D04A(1821300) DC310V (YE) VSD (YE) VSD
☐ Rear	MATION IP24 E级 紅 (RD) Vm に (RD) Vm
☐ Right	卧龙电气驱动集团股份有限公司 WOLONG ELECTRIC GROUP CO.,LTD.
□ Left	
□ Тор	
☐ Bottom	

Details of:	Main Control Board for CGK-030V4P
View: General Front Rear Right Left Top Bottom	iğino.

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 46 of 59 www.tuvsud.com



 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China

Details of:	Water Pump for CGK-030V4P
View: General Front Rear Right Left Top Bottom	GRUNDFOS UPM4XL K 25-90 130

General Front Rear Right Left	Details of:	Overall view for CGK-040V4P
Front Rear Right Left	/iew:	ogeneagennagennagennagennagennagennagenn
Rear Right Left	General	
Right Left	Front	
□ Left	Rear	The state of the s
	Right	
□ Top	Left	Bang Park
	□ Тор	
□ Bottom	Bottom	

Doc No.: ITC-TTW0902.02E - Rev.13

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 47 of 59 www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Details of:	Compressor for CGK-040V4P
View: General Front Rear Right Left Top Bottom	Panasonic H420D7KZAAC6 COMPRESSOR DC MOTOR 280V —— SERIAL NO. K42W F0000033 7975739 R290 Panasonic Corporation 松下. 万宝(广州) 压缩机有限公司 Made in China Panasonic Wanbao Appliances Compressor (Guangzhou) Co., Ltd. 36, Wanbao North Street, Wanbao Industry Zone, Zhongcun, Panyu District, Guangzhou City, Guangdong Province, China WARNING/DANGER 注意(维修、检查时经确计)

De	tails of:	Fan Motor for CGK-040V4P
Vie	ew:	
	General	WOLONG空调用无刷直流电动机 ZWB278D04A(1821300) DC310V 遊(BU)FG ROHS
	Front	TUZW RD 020-1 (YE) Vsp
	Rear	HP24 E级
	Right	TO THE GROUP CO.,LTD.
	Left	
	Тор	
	Bottom	

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023

Date: 2023-11-07 Page: 48 of 59 www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Details of:	Main Control Board for CGK-040V4P
View: General Front Rear Right Left Top Bottom	i. jāmo

Details of:	Water Pump for CGK-040V4P
View: General Front Rear Right Left Top Bottom	GRUNDFOS UPM4XL K 25-90 130
□ Bottom	

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 49 of 59 www.tuvsud.com



 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Overall view for CGK-050V4P

Details of:	Compressor for CGK-050V4P
View: General Front Rear Right Left Top	Panasonic H550D7VZAAC6 COMPRESSOR DC MOTOR 520V SERIAL NO. V55T F9999997 7975740 Panasonic Corporation 松下. 万宝 (广州) 压缩机有限公司 Made in China Panasonic Wanbao Appliances Compressor (Guangzhou) Co., Ltd. 36, Nanbao North Street, Wanbao Industry Zone, Zhongcun, Panyu District, GuangZhou City, Guangdong Province, China WARNING/DANGER 注音(维修、检查时必须遵守)
□ Left	Panasonic Corporation 松下、万宝(广州) 压缩机有限公司 Made in China Panasonic Nanbao Appliances Compressor (Guangzhou) Co., Ltd. 36. Nanbao North Street, Nanbao Industry Zone, Zhongcun, Panyu District, GuangZhou City, Guangdong Province, China MARNING/DANGER 注音(维修、检查时必须遵守)
Bottom	Danger of Electric Shock 有触电的危险

Project No: 64.181.23.03037.01

Rev.: 00 Date: 202

Date: 2023-11-07 Page: 50 of 59 www.tuvsud.com

TÜV®

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China Tel: +86 20 38320668

Technical Report



Appendix III photo documentation

Details of:	Fan Motor for CGK-050V4P
View: General Front Rear Right Left	WOLONG CHECK SERVER BLOC Lotar ZWB278D0AA(1821300) DC310V 102W 8P 920r/min M 白 (WH) Voc ## (BU) Vm ## (BU) V
□ Bottom	

Details of:	Main Control Board for CGK-050V4P
View:	• •
☐ General	
☐ Front	
☐ Rear	
☐ Right	
☐ Left	
□ Тор	
☐ Bottom	

Project No: 64.181.23.03037.01

Rev.: 00

Date: 2023-11-07 Page: 51 of 59

www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China



Details of:	Water Pump for CGK-050V4P
View: General Front Rear Right Left Top Bottom	UPM10L 25-105 130

Details of:	Overall view for CGK-060V4P
View:	2
☐ General	to App word Age
☐ Front	Agennesis de la companya de la compa
□ Rear	Control Contro
□ Right	and the state of t
□ Left	The second secon
□ Тор	The same Care of the sa
☐ Bottom	- Anna da anna
	The state of the s

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023

Date: 2023-11-07 Page: 52 of 59 www.tuvsud.com

TÜV®

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China Tel: +86 20 38320668



Details of:	Compressor for CGK-060V4P
View: General Front Rear Right Left Top Bottom	Panasonic H650D7VZAAC6 COMPRESSOR DC MOTOR 520V SERIAL NO. V65Z F9999997 7975741 Panasonic Corporation 松下. 万宝 (广州) 压缩机有限公司 Made in China Panasonic Wanbao Appliances Compressor (Guangzhou) Co., Ltd. 36, Wanbao Morth Street, Wanbao Industry Zone, Zhongcun, Panyu District, GuangZhou City, Guangdong Province, China NARNING/DANGER 注意(维修, 检查时必须建计)

œ.
WOLONG 空调用无脚重速电动机 Q.C.PASS % RoHS ROHS
TWB278D04A(1821300) DC310V 102W 8P 920r/min (MH) Vcc (RB) Vsp (WH) Vcc (RB) GND (RD) Vm
P24 E级 D 龙电气驱动集团股份有限公司 WOLONG ELECTRIC GROUP CO.,LTD.
HOLONG ELECTRIC GROUP GO.,E

Project No: 64.181.23.03037.01

Rev.: 00 Date: 202

Date: 2023-11-07 Page: 53 of 59 www.tuvsud.com

 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China Tel: +86 20 38320668



Details of:	Main Control Board for CGK-060V4P
View: General Front Rear Right Left Top Bottom	

Details of:	Water Pump for CGK-060V4P
View:	(e)
☐ General	GRUNDFOS X UPM10L
☐ Front	25-105 130
□ Rear	EEL < 0.20 - Part 3 Ptoms 62WW 230V ~ 50/80HzHz IPX4D TF 110 GFBSA Min 20°C P/N:93032863 PC:2335CHU
☐ Right	Made in Denmark Grandles Hot All Made in Denmark Grandles Hot All Made in Denmark Grandles Hot All Made in Denmark Grandles Hot Made
☐ Left	(€
□ Тор	
☐ Bottom	

Project No: 64.181.23.03037.01

Rev.: 00 Date: 202

Date: 2023-11-07 Page: 54 of 59 www.tuvsud.com



 $\mbox{T\"{UV}}$ $\mbox{S\"{UD}}$ Certification and Testing (China) Co., Ltd. Guangzhou Branch

5F&8F East, Communication Building, No.163 Pingyun Road, Huangpu Ave. West, Guangzhou 510656, China





Model: CGK-030V4P		
Part		Technical data
1. Compressor		
	Manufacture:	Panasonic Wanbao Appliances Compressor
		(Guangzhou) Co., Ltd.
	Туре:	H420D7KZAAC6
	Rated capacity:	2245W
	Serial-number:	F0000030
	Specification:	DC280V; R290
2. Condenser		
	Manufacture:	Jiangsu Yuanzhuo Equipment Manfactur Co.,Ltd
	Туре:	ZL62FA-26AD-CG
	Heat exchanger:	Plate heat exchanger
	Dimension(mm):	526(L)mmX119(H)mmX63(D)mm
3. Evaporator		
	Manufacture:	Guangzhou Aotai Refrigeration Equipment Co.,Ltd.
	Туре:	03KH-CP-01
	Heat exchanger:	Finned-coil heat exchanger
	Dimension(mm):	660(L)mmX750(H)mmX356.8(D)mm
4. Fan motor		
	Manufacture:	Wolong Electric Group Co., Ltd
	Type:	ZWB278D04A
	Fan type:	3 blade
	Specification:	DC310V; 102W
5. Main control board		
	Manufacture:	CAREL
	Type:	UP3F00200T3S04
	Specification:	220-240V~; 50Hz
6. Water pump		
	Manufacture:	GRUNDFOS
	Type:	UPM4XL K 25-90 130
	Specification:	230V~; 50/60Hz
*(Alternative)		
	Manufacture:	Shinhoo
	Type:	GPA25-9HW
	Specification:	230V~; 50/60Hz
	1	I

Remark: * means the test results were not performed on the alternative components.

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 55 of 59







Model: <u>CGK-040V4P</u>					
Part		Technical data			
1. Compressor					
	Manufacture:	Panasonic Wanbao Appliances Compressor			
		(Guangzhou) Co., Ltd.			
	Туре:	H420D7KZAAC6			
	Rated capacity:	2245W			
	Serial-number:	F0000033			
	Specification:	DC280V; R290			
2. Condenser					
	Manufacture:	Jiangsu Yuanzhuo Equipment Manfactur Co.,Ltd			
	Type:	ZL62FA-30AD-CG			
	Heat exchanger:	Plate heat exchanger			
	Dimension(mm):	526(L)mmX119(H)mmX71(D)mm			
3. Evaporator					
	Manufacture:	Guangzhou Aotai Refrigeration EquipmentCo.,Ltd.			
	Туре:	04KH-CP-01			
	Heat exchanger:	Finned-coil heat exchanger			
	Dimension(mm):	660.4(L)mmX900(H)mmX343.3(D)mm			
4. Fan motor					
	Manufacture:	Wolong Electric Group Co., Ltd			
	Type:	ZWB278D04A			
	Fan type:	3 blade			
	Specification:	DC310V; 102W			
5. Main control board	,				
	Manufacture:	CAREL			
	Type:	UP3F00200T3S04			
	Specification:	220-240V~; 50Hz			
6. Water pump	<u> </u>				
1 · r	Manufacture:	GRUNDFOS			
	Type:	UPM4XL K 25-90 130			
	Specification:	230V~; 50/60Hz			
*(Alternative)		,			
(Manufacture:	Shinhoo			
	Type:	GPA25-9HW			
	Specification:	230V~; 50/60Hz			
	·	ormed on the alternative components			

Remark: * means the test results were not performed on the alternative components.

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 56 of 59







Model: <u>CGK-050V4P</u>					
Part		Technical data			
1. Compressor					
	Manufacture:	Panasonic Wanbao Appliances Compressor			
		(Guangzhou) Co., Ltd.			
	Туре:	H550D7VZAAC6			
	Rated capacity:	3120W			
	Serial-number:	F9999997			
	Specification:	DC520V; R290			
2. Condenser					
	Manufacture:	Jiangsu Yuanzhuo Equipment Manfactur Co.,Ltd			
	Type:	ZL62FA-40AD-CG			
	Heat exchanger:	Plate heat exchanger			
	Dimension(mm):	526(L)mmX119(H)mmX91(D)mm			
3. Evaporator					
	Manufacture:	Guangzhou Aotai Refrigeration Equipment Co.,Ltd.			
	Туре:	05KH-CP-01			
	Heat exchanger:	Finned-coil heat exchanger			
	Dimension(mm):	660.4(L)mmX1300(H)mmX343.3(D)mm			
4. Fan motor					
	Manufacture:	Wolong Electric Group Co., Ltd			
	Type:	ZWB278D04A			
	Fan type:	3 blade			
	Specification:	DC310V; 102W			
5. Main control board	<u> </u>				
	Manufacture:	CAREL			
	Type:	UP3F00200T3S04			
	Specification:	220-240V~; 50Hz			
6. Water pump					
	Manufacture:	GRUNDFOS			
	Type:	UPM10L 25-105 130			
	Specification:	230V~; 50/60Hz			
*(Alternative)	- Poomodion				
(Automative)	Manufacture:	Shinhoo			
		GPA25-11H			
	Type:				
	Specification:	230V~; 50Hz			

Remark: * means the test results were not performed on the alternative components.

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 57 of 59







Model: <u>CGK-060V4P</u>					
Part		Technical data			
1. Compressor					
	Manufacture:	Panasonic Wanbao Appliances Compressor			
		(Guangzhou) Co., Ltd.			
	Type:	H650D7VZAAC6			
	Rated capacity:	3640W			
	Serial-number:	F9999997			
	Specification:	DC520V; R290			
2. Condenser					
	Manufacture:	Jiangsu Yuanzhuo Equipment Manfactur Co.,Ltd			
	Type:	ZL62FA-40AD-CG			
	Heat exchanger:	Plate heat exchanger			
	Dimension(mm):	526(L)mmX119(H)mmX91(D)mm			
3. Evaporator					
	Manufacture:	Guangzhou Aotai Refrigeration Equipment Co.,Ltd.			
	Type:	06KH-CP-01			
	Heat exchanger:	Finned-coil heat exchanger			
	Dimension(mm):	660.4(L)mmX1300(H)mmX343.3(D)mm			
4. Fan motor					
	Manufacture:	Wolong Electric Group Co., Ltd			
	Type:	ZWB278D04A			
	Fan type:	3 blade			
	Specification:	DC310V; 102W			
5. Main control board	,				
	Manufacture:	CAREL			
	Type:	UP3F00200T3S04			
	Specification:	220-240V~; 50Hz			
6. Water pump	,	<u> </u>			
1 · r	Manufacture:	GRUNDFOS			
	Type:	UPM10L 25-105 130			
	Specification:	230V~; 50/60Hz			
*(Alternative)		, , , , , , , , , , , , , , , , , , , ,			
(, atomativo)	Manufacture:	Shinhoo			
	Type:	GPA25-11H			
	Specification:				
		230V~; 50Hz			

Remark: * means the test results were not performed on the alternative components.

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 58 of 59

www.tuvsud.com





Appendix V Equipment List

No.	Туре	Manufacture	Model	Equipment ID	Calibration Due Date
1	Heat pump energy efficiency testing system	PINXIN	10HP	2017J00001	2023-11-24
2	Electromagnetic flowmeter	KROHNE	OPTIFLUX4100C	H17221264	2023-12-21
3	Anechoic rooms (hemi-anechoic rooms)	Guangzhou Kinte	-	NC-036-2	2024-10-07
4	AC source Supply	YANGHONG	YF-3600	VGDS-0637	2024-11-07
5	6 channel data logger	_	PXI-1033	VGDY-0257	2024-05-20
6	PULSE system	B & K	3660C	VGDY-0184	2024-04-12
7	Calibrator	B & K	4231	HJ-000095	2024-06-30
8	Long steel tape	_	5m	HJ-000150	2024-01-01
9	Temperature measurement system	_	_	NC-036-1	2024-06-07
10	Atmospheric pressure meter	_	-	HJ-000165	2023-11-22
11	Constant temperature water system	B & K	_	VGDS-0448	2024-04-18
12	Windscreen	B & K	WS002-5	_	_

-- End of Report --

Project No: 64.181.23.03037.01

Rev.: 00 Date: 2023-11-07 Page: 59 of 59 www.tuvsud.com

TÜV®